

# MUSWAY


MUSIC IS THE WAY

# CSB4.2C


COMPONENT SYSTEM FOR BMW VEHICLES

## INSTALLATION OPTIONS

The speakers can be installed in these 3 variants according to your vehicle. Make sure which variant is

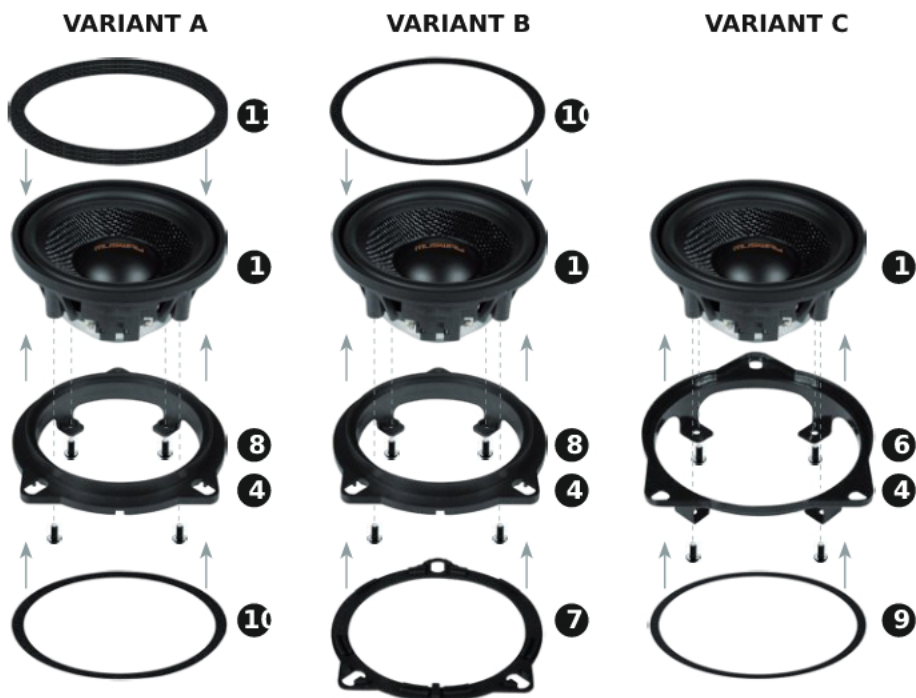

## INTERCONNECTION

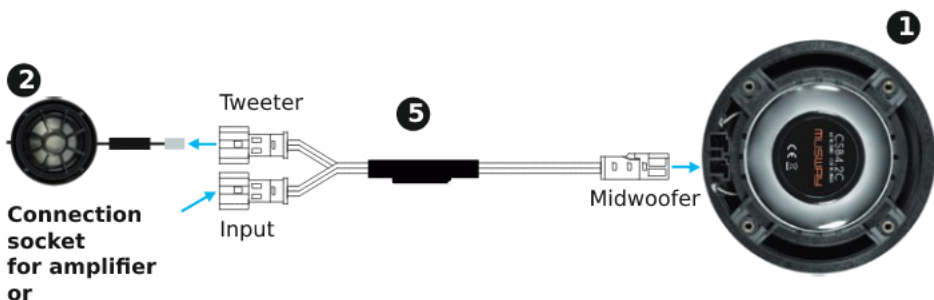

## TECHNICAL SPECIFICATIONS

10 cm (4") 2-Way  
Component System  
60 Watts/RMS, 120  
Watts/MAX  
Impedance 4 Ohms  
Frequency Response 75 -  
22000 Hz  
10 cm Woofer, Glass Fiber  
Cone  
Dual Neodymium Magnet

## COMPATIBILITY

All BMW E/F/G models  
Compatibility depending on model and equipment. No  
liability assumed.  
State of compatibility: June 2019

## IMPORTANT NOTE

This manual is an installation aid for professional installation of the sound system.

Please read the following notes:

- Please handle all parts of the sound system and the components of your vehicle with care.
- Under all circumstances observe the instructions of the vehicle

## LEGAL NOTICE

- MUSWAY or Audio Design GmbH are in no way affiliated with Bayerische Motoren Werke (BMW) AG or any of its subsidiaries or affiliates, or acting on their behalf or with their authorization.
- All registered product names and brand names are the property of their

## CUSTOMER SERVICE

As a rule, the installation of the sound system must be carried out by a trained and technically skilled specialist. However, if you decide to do it yourself, contact your dealer or the Audio

## MOUNTING EXAMPLE BMW Series 5

### 1. Remove the handle bar



Pry out the handle of the door opener

### 2. Remove the screws from the handle



Remove the two exposed screws

### 3. Dismantling the door panel



Pry the door trim from the door panel




Carefully remove the clips and trim



Now disconnect all the plugs that are connected to the door trim

### 4. Disassembly of the speakers

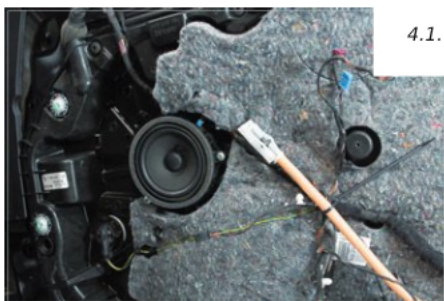

After removing the door panel, the speaker is freely accessible and can now be removed.



## 5. Mounting the speakers



5.1.



5.2.

Use the screws to attach the frame to the speaker (included) and the supplied rubber ring to the frame (included)



5.3.



5.4.

Connect the plugs to the Musway speaker (See page 3) and then mount the Musway speaker with the screws



5.5.



5.6.

Plug the Musway tweeter into the mirror triangle

Attach the triangle to the door and connect the tweeter cable (See page 3 or Figure 5.3.)

## 6. Mount the door trim in reverse order.

\* May vary with specific models or equipment versions. Specifications are without guarantee.

# MUSWAY

MUSIC IS THE WAY

MUSWAY is a brand of Audio Design  
26820 Hobie Cir. Suite A-1  
Murrieta, CA 92562 USA  
[www.muswayusa.com](http://www.muswayusa.com)